

SAFETY GLAZING



101 DEVELOPMENT RESOURCES, INC.


320-226.5189

www.101developmentresources.com







While every attempt has been made to insure the correctness of this handout, no guarantees are made to its accuracy or completeness. Responsibility for compliance with applicable codes and ordinances falls on the owner or contractor. For specific questions regarding code requirements, refer to the applicable codes or contact 101 Development Resources, Inc.


IDENTIFICATION OF SAFETY GLAZING

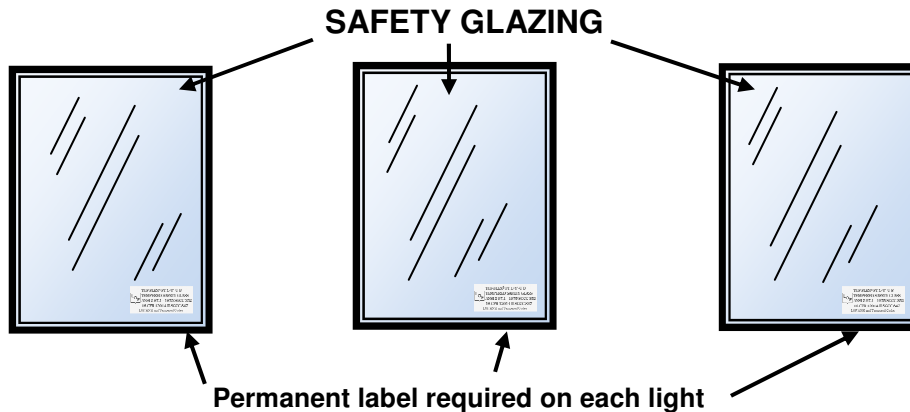


LABEL EXAMPLES

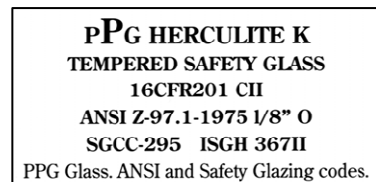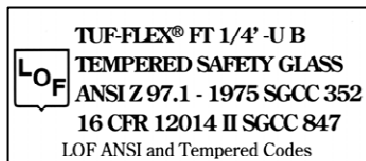



SAFETY GLAZING IN DOORS REQUIRED IN ALL LOCATIONS SHOWN

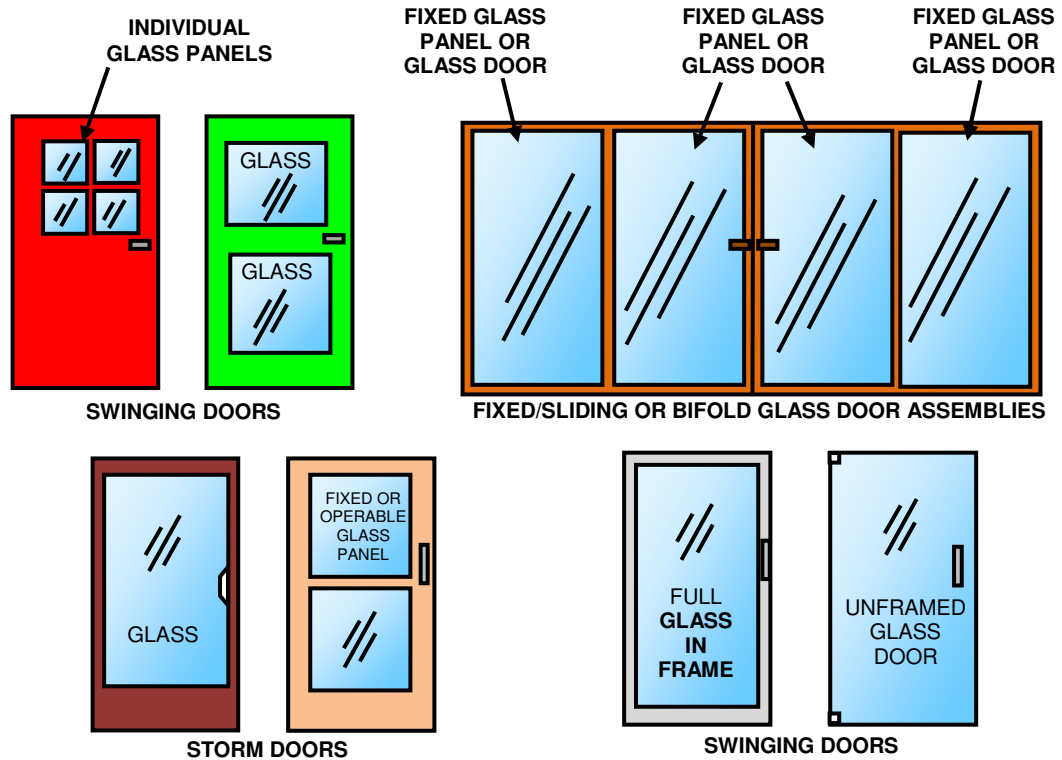


SAFETY GLAZING ADJACENT DOORS

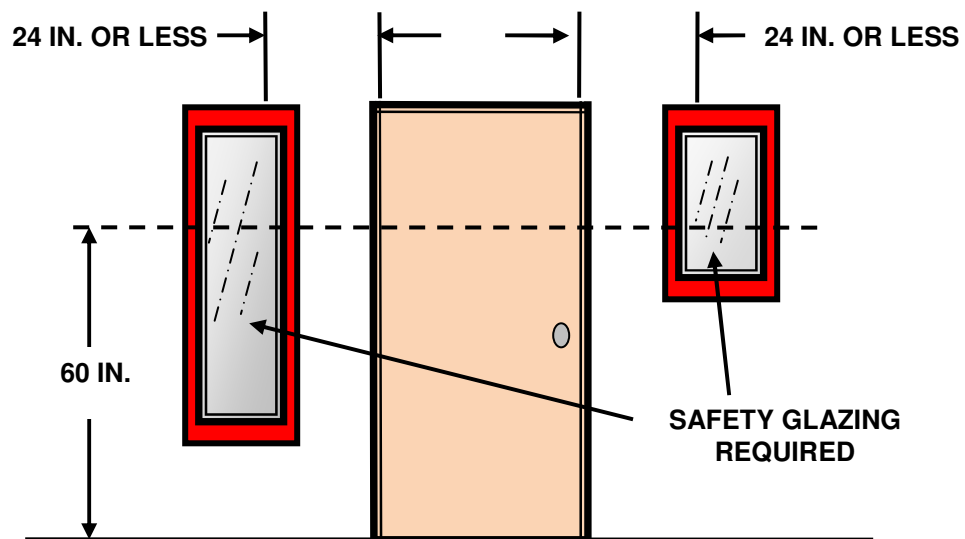

SAFETY GLAZING ADJACENT A BATH TUB OR IN TUB OR SHOWER ENCLOSURES

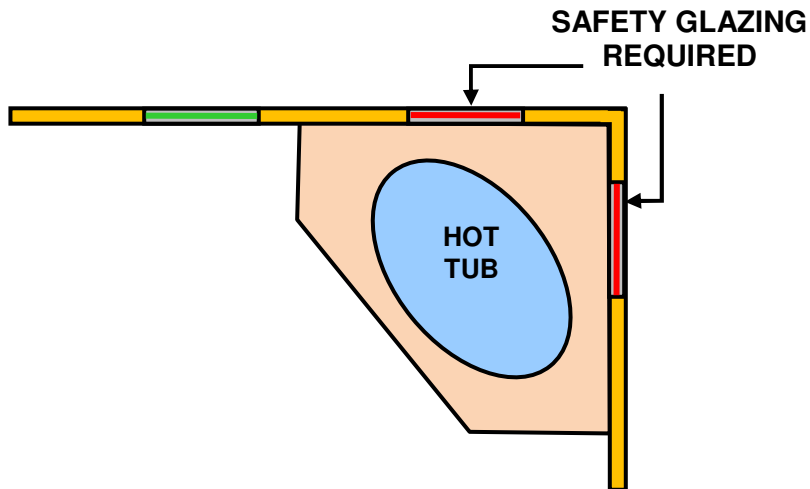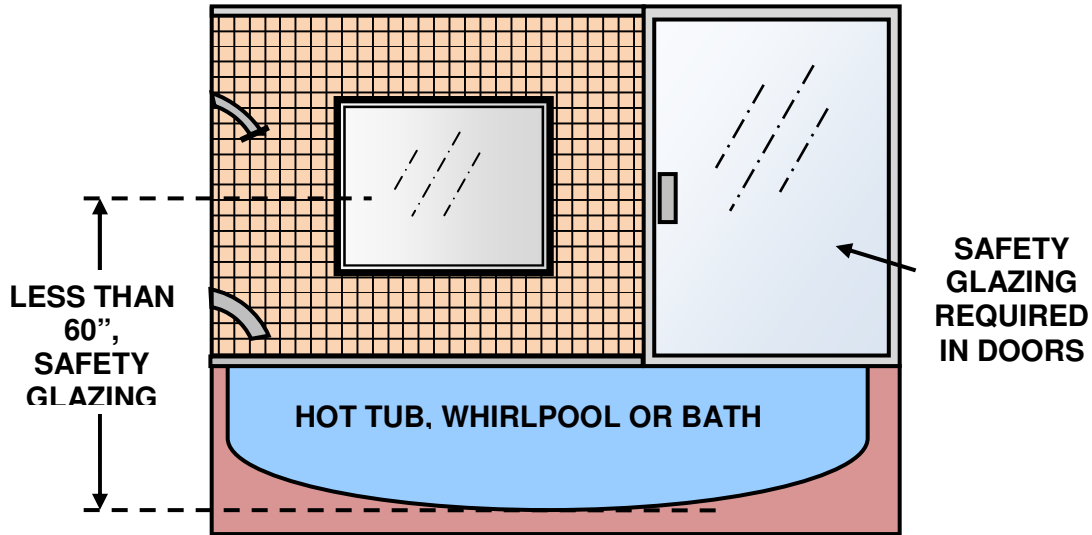


SAFETY GLAZING REQUIRED ADJACENT SWIMMING POOLS

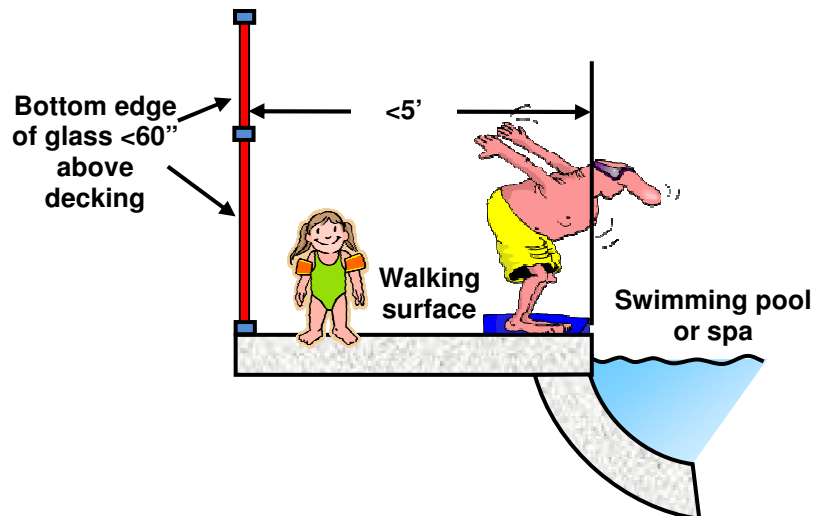


SAFETY GLAZING IN WINDOWS

SAFETY GLAZING REQUIRED IF ALL FOUR CRITERIA EXIST

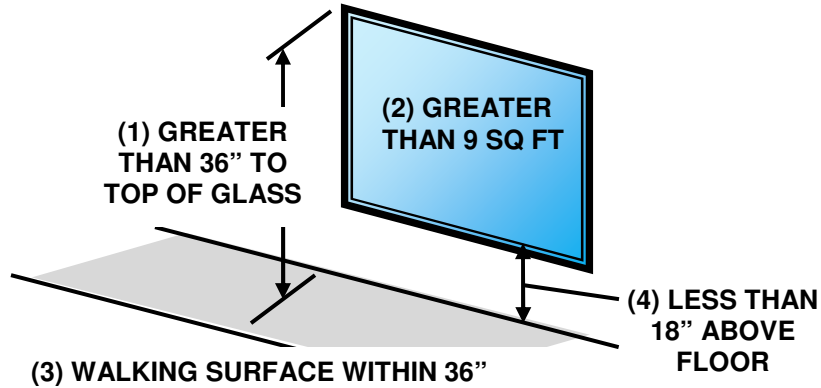

IF THE WINDOW HAS A BAR OR RAIL MOUNTED 34-38" ABOVE THE PLANE OF THE WALKING SURFACE, SAFETY GLAZING IS NOT REQUIRED. THE BAR OR RAIL MUST BE AT LEAST 1 1/2" THICK AND NOT CONTACT THE GLASS.

SAFETY GLAZING FOR STAIRS AND LANDINGS

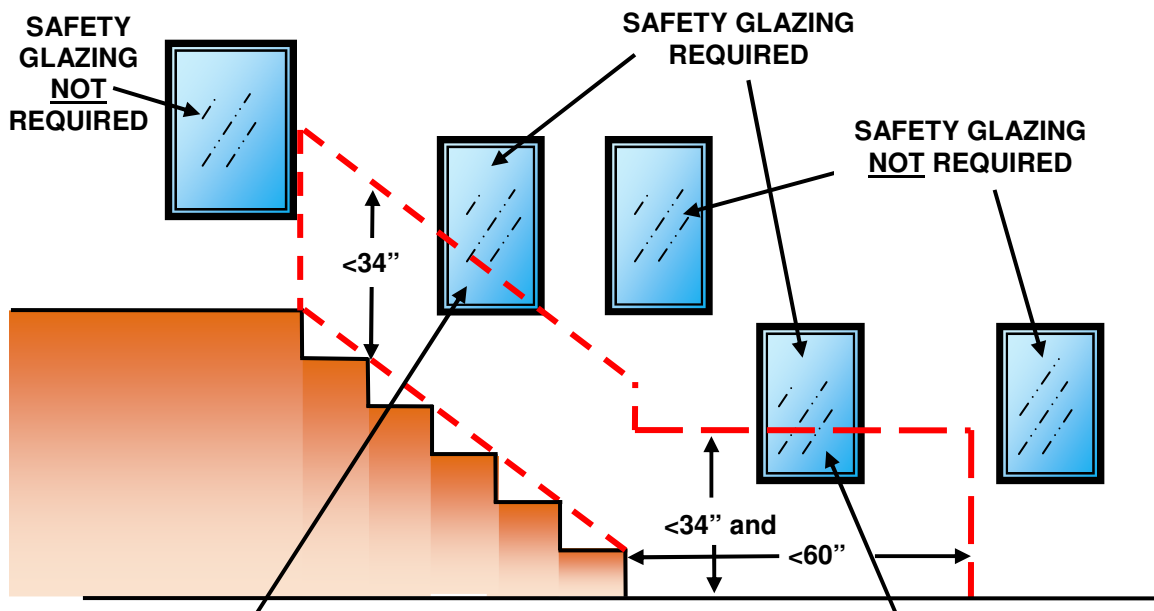

IF THE WINDOW HAS A BAR OR RAIL MOUNTED 34-38" ABOVE THE NOSING OF THE TREADS, SAFETY GLAZING IS NOT REQUIRED. THE BAR OR RAIL MUST BE AT LEAST 1 1/2" THICK AND NOT CONTACT THE GLASS.

IF THE WINDOW HAS A GUARD AT LEAST 36 INCHES IN HEIGHT AND THE GLASS IS AT LEAST 18 INCHES FROM THE GUARD, SAFETY GLAZING IS NOT REQUIRED.